

Specifications	Dual Cab DX Pick Up 4x2	Dual Cab RX Pick Up 4x2	Dual Cab ST Pick Up 4x2	Dual Cab ST-X Pick Up 4x2	Dual Cab RX Cab Chassis 4x4	Dual Cab RX Pick Up 4x4	Dual Cab SL Pick Up 4x4	Dual Cab ST Pick Up 4x4	Dual Cab ST- Pick Up 4x4
Engine									
YS23DDTT 2.3 litre intercooled twin turbo-diesel, DOHC			•	•			•	•	•
YS23DDT 2.3 litre intercooled single turbo-diesel, DOHC		•			•	•			
QR25DE 2.5 litre petrol, DOHC	•								
Displacement (cc)	2488	2298	2298	2298	2298	2298	2298	2298	2298
Bore x stroke (mm)	89.0 x 100.0	85.0 × 101.3	85.0 × 101.3	85.0 × 101.3	85.0 × 101.3	85.0 × 101.3	85.0 × 101.3	85.0 × 101.3	85.0 x 101.3
Maximum power (kW@rpm)	122@6000	120@3750	140@3750	140@3750	120@3750	120@3750	140@3750	140@3750	140@3750
Maximum torque (Nm@rpm)	238@4000	403@1500-2500			403@1500-2500	403@1500-2500	450@1500-2500		
Multipoint fuel injection	•								_
Common rail direct injection		•	•	•	•	•	•	•	•
	1						_		
Transmission									
6-speed manual	•	•	•	•	•	•	•	•	•
7-speed automatic with manual mode	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt
Transfer case - Dual range 4x4 with electronic 4WD selection					•	•	•	•	•
Ratio 1st (manual/automatic)	4.685/4.783	4.685/4.886	4.685/4.886	4.685/4.886	4.685/4.886	4.685/4.886	4.685/4.886	4.685/4.886	4.685/4.886
Ratio 2nd (manual/automatic)		2.478/3.169							
	2.478/3.102		2.478/3.169	2.478/3.169 1.623/2.027	2.478/3.169	2.478/3.169	2.478/3.169 1.623/2.027	2.478/3.169	2.478/3.169
Ratio 3rd (manual/automatic)	1.623/1.984	1.623/2.027	1.623/2.027		1.623/2.027	1.623/2.027		1.623/2.027	1.623/2.027
Ratio 4th (manual/automatic)	1.207/1.371	1.207/1.411	1.207/1.411	1.207/1.411	1.207/1.411	1.207/1.411	1.207/1.411	1.207/1.411	1.207/1.411
Ratio 5th (manual/automatic)	1.000/1.000	1.000/1.000	1.000/1.000	1.000/1.000	1.000/1.000	1.000/1.000	1.000/1.000	1.000/1.000	1.000/1.000
Ratio 6th (manual/automatic)	0.808/0.870	0.808/0.864	0.808/0.864	0.808/0.864	0.808/0.864	0.808/0.864	0.808/0.864	0.808/0.864	0.808/0.86
Ratio 7th (automatic)	0.775	0.774	0.774	0.774	0.774	0.774	0.774	0.774	0.774
Ratio Reverse (manual/automatic)	4.709/3.858	4.709/4.041	4.709/4.041	4.709/4.041	4.709/4.041	4.709/4.041	4.709/4.041	4.709/4.041	4.709/4.04
Final drive (manual/automatic)	3.916/3.538	3.538/3.357	3.692/3.357	3.692/3.357	3.538/3.357	3.538/3.357	3.692/3.357	3.692/3.357	3.692/3.357
Transfer ratio - low					2.717	2.717	2.717	2.717	2.717
Transfer ratio - high					1.000	1.000	1.000	1.000	1.000
Dimensions									
Overall length (mm)	5255	5255	5255	5255	5120	5255	5255	5255	5255
Overall width (excluding mirrors) (mm)	1790	1790	1850	1850	1790	1790	1850	1850	1850
Overall height (without roof rail) (mm)	1760	1785	1795	1825	1800	1800	1810	1810	1840
Wheelbase (mm)	3150	3150	3150	3150	3150	3150	3150	3150	3150
Track front/rear (mm)	1560/1560	1550/1550	1570/1570	1570/1570	1550/1550	1550/1550	1570/1570	1570/1570	1570/1570
	11.8	11.8	12.4	12.4	11.8	11.8	12.4	12.4	12.4
Min. turning circle (kerb to kerb) (m)		214	226	228	219	217	226	226	228
Ground clearance unladen (mm)	191								
Overhang - front	870	870	870	870	870	870	870	870	870
Overhang - rear	1235	1235	1235	1235	1100	1235	1235	1235	1235
Approach angle (degrees)	29.5	31.6	31.3	31.4	32.5	32.5	32.2	32.2	32.4
Departure angle (degrees)	24.0	25.2	25.8	26.0	26.3	25.9	26.5	26.5	26.7
Ramp breakover angle (degrees)	19.8	21.6	22.6	22.7	22.8	22.7	23.7	23.7	23.8
Cargo Bed - length floor (mm)	1503	1503	1503	1503		1503	1503	1503	1503
Cargo Bed - length top (mm)	1465	1465	1465	1465		1465	1465	1465	1465
Cargo Bed - width floor (mm)	1560	1560	1560	1560		1560	1560	1560	1560
Cargo Bed - width top (mm)	1490	1490	1490	1490		1490	1490	1490	1490
Cargo Bed - width between wheel arches (mm)	1130	1130	1130	1130		1130	1130	1130	1130
Cargo Bed - tailgate opening width (mm)	1360	1360	1360	1360		1360	1360	1360	1360
Cargo Bed - height (mm)	474	474	474	474		474	474	474	474
g- 500g(7/7	7/7	7/7	7/7	<u> </u>	7/7	7/7	7/7	-/-4
Weights									
Gross Vehicle Mass (GVM**) (kg)	2550	2910	2910	2910	2910	2910	2910	2910	2910
Gross Combined Mass (GCM*) (kg)	4138	5910	5910	5910	5910	5910	5910	5910	5910
	4130	0166	DAIO	2910	טופכ	טופני	טופנ	טופנ	2910
Kerb mass manual/automatic (kg) +11kg with optional sunroof on ST-X Payload ^a manual/automatic (kg)	1649/1670	1801/1807	1838/1844	1881/1888	1763/1780	1879/1886	1923/1928	1920/1925	1963/1969
Payload manual/automatic (kg) -11kg with optional sunroof on ST-X	901/880	1109/1103	1072/1066	1029/1022	1147/1130	1031/1024	987/982	990/985	947/941
Gross front axle (kg)	1320	1320	1320	1320	1320	1320	1320	1320	1320
Gross rear axle (kg)	1530	1750	1750	1700	1750	1750	1750	1750	1700
	1	1	1	1	1		1		1
Towing Capacity [†]									
Trailer without brakes (kg)	750	750	750	750	750	750	750	750	750
Trailer with brakes (kg)	1588	3500	3500	3500	3500	3500	3500	3500	3500
		· ·							1



Specifications	Dual Cab DX Pick Up 4x2	Dual Cab RX Pick Up 4x2	Dual Cab ST Pick Up 4x2	Dual Cab ST-X Pick Up 4x2	Dual Cab RX Cab Chassis 4x4	Dual Cab RX Pick Up 4x4	Dual Cab SL Pick Up 4x4	Dual Cab ST Pick Up 4x4	Dual Cab ST- Pick Up 4x4
Engine							'		
YS23DDTT 2.3 litre intercooled twin turbo-diesel, DOHC			•	•			•	•	•
YS23DDT 2.3 litre intercooled single turbo-diesel, DOHC		•			•	•			
QR25DE 2.5 litre petrol, DOHC	•								
Displacement (cc)	2488	2298	2298	2298	2298	2298	2298	2298	2298
Bore x stroke (mm)	89.0 x 100.0	85.0 x 101.3	85.0 x 101.3	85.0 x 101.3	85.0 × 101.3	85.0 × 101.3	85.0 x 101.3	85.0 x 101.3	85.0 x 101.3
Maximum power (kW@rpm)	122@6000	120@3750	140@3750	140@3750	120@3750	120@3750	140@3750	140@3750	140@3750
Maximum torque (Nm@rpm)	238@4000	403@1500-2500	450@1500-2500	450@1500-2500	403@1500-2500	403@1500-2500	450@1500-2500	450@1500-2500	450@1500-25
Multipoint fuel injection	•								
Common rail direct injection		•	•	•	•	•	•	•	•
Transmission	l								
6-speed manual	•	•	•	•	•	•	•		•
7-speed automatic with manual mode	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt
Transfer case - Dual range 4x4 with electronic 4WD selection					•	•	•	•	•
Ratio 1st (manual/automatic)	4.685/4.783	4.685/4.886	4.685/4.886	4.685/4.886	4.685/4.886	4.685/4.886	4.685/4.886	4.685/4.886	4.685/4.886
Ratio 2nd (manual/automatic)									
· · · · · · · · · · · · · · · · · · ·	2.478/3.102	2.478/3.169	2.478/3.169	2.478/3.169	2.478/3.169	2.478/3.169	2.478/3.169	2.478/3.169	2.478/3.169
Ratio 3rd (manual/automatic)	1.623/1.984	1.623/2.027	1.623/2.027	1.623/2.027	1.623/2.027	1.623/2.027	1.623/2.027	1.623/2.027	1.623/2.027
Ratio 4th (manual/automatic)	1.207/1.371	1.207/1.411	1.207/1.411	1.207/1.411	1.207/1.411	1.207/1.411	1.207/1.411	1.207/1.411	1.207/1.411
Ratio 5th (manual/automatic)	1.000/1.000	1.000/1.000	1.000/1.000	1.000/1.000	1.000/1.000	1.000/1.000	1.000/1.000	1.000/1.000	1.000/1.000
Ratio 6th (manual/automatic)	0.808/0.870	0.808/0.864	0.808/0.864	0.808/0.864	0.808/0.864	0.808/0.864	0.808/0.864	0.808/0.864	0.808/0.864
Ratio 7th (automatic)	0.775	0.774	0.774	0.774	0.774	0.774	0.774	0.774	0.774
Ratio Reverse (manual/automatic)	4.709/3.858	4.709/4.041	4.709/4.041	4.709/4.041	4.709/4.041	4.709/4.041	4.709/4.041	4.709/4.041	4.709/4.04
Final drive (manual/automatic)	3.916/3.538	3.538/3.357	3.692/3.357	3.692/3.357	3.538/3.357	3.538/3.357	3.692/3.357	3.692/3.357	3.692/3.357
Transfer ratio - low					2.717	2.717	2.717	2.717	2.717
Transfer ratio - high					1.000	1.000	1.000	1.000	1.000
Dimensions									
Overall length (mm)	5255	5255	5255	5255	5120	5255	5255	5255	5255
Overall width (excluding mirrors) (mm)	1790	1790	1850	1850	1790	1790	1850	1850	1850
Overall height (without roof rail) (mm)	1760	1785	1795	1825	1800	1800	1810	1810	1840
Wheelbase (mm)	3150	3150	3150	3150	3150	3150	3150	3150	3150
Track front/rear (mm)	1560/1560	1550/1550	1570/1570	1570/1570	1550/1550	1550/1550	1570/1570	1570/1570	1570/1570
Min. turning circle (kerb to kerb) (m)	11.8	11.8	12.4	12.4	11.8	11.8	12.4	12.4	12.4
Ground clearance unladen (mm)	191	214	226	228	219	217	226	226	228
Overhang - front	870	870	870	870	870	870	870	870	870
Overhang - rear	1235	1235	1235	1235	1100	1235	1235	1235	1235
-									
Approach angle (degrees)	29.5	31.6	31.3	31.4	32.5	32.5	32.2	32.2	32.4
Departure angle (degrees)	24.0	25.2	25.8	26.0	26.3	25.9	26.5	26.5	26.7
Ramp breakover angle (degrees)	19.8	21.6	22.6	22.7	22.8	22.7	23.7	23.7	23.8
Cargo Bed - length floor (mm)	1503	1503	1503	1503		1503	1503	1503	1503
Cargo Bed - length top (mm)	1465	1465	1465	1465		1465	1465	1465	1465
Cargo Bed - width floor (mm)	1560	1560	1560	1560		1560	1560	1560	1560
Cargo Bed - width top (mm)	1490	1490	1490	1490		1490	1490	1490	1490
Cargo Bed - width between wheel arches (mm)	1130	1130	1130	1130		1130	1130	1130	1130
Cargo Bed - tailgate opening width (mm)	1360	1360	1360	1360		1360	1360	1360	1360
Cargo Bed - height (mm)	474	474	474	474		474	474	474	474
Weights									
Gross Vehicle Mass (GVM**) (kg)	2550	2910	2910	2910	2910	2910	2910	2910	2910
Gross Combined Mass (GCM") (kg)	4138	5910	5910	5910	5910	5910	5910	5910	5910
Kerb mass manual/automatic (kg)	1649/1670	1801/1807	1838/1844	1881/1888	1763/1780	1879/1886	1923/1928	1920/1925	1963/1969
r11kg with optional sunroof on ST-X Payload ^a manual/automatic (kg)	901/880	1109/1103	1072/1066	1029/1022	1147/1130	1031/1024	987/982	990/985	947/941
-11kg with optional sunroof on ST-X									
Gross front axle (kg) Gross rear axle (kg)	1320 1530	1320 1750	1320 1750	1320 1700	1320 1750	1320 1750	1320 1750	1320 1750	1320 1700
SI SISTICUI BAIC [AG]	1330	1750	1750	1700	1730	1750	1750	1750	1700
Towing Capacity [†]	_	_	_	_					
Trailer without brakes (kg)	750	750	750	750	750	750	750	750	750
Trailer with brakes (kg)	1588	3500	3500	3500	3500	3500	3500	3500	3500
Towball download (kg)	See table	See table	See table	See table	See table	See table	See table	See table	See table



Specifications	Dual Cab DX Pick Up 4x2	Dual Cab RX Pick Up 4x2	Dual Cab ST Pick Up 4x2	Dual Cab ST-X Pick Up 4x2	Dual Cab RX Cab Chassis 4x4	Dual Cab RX Pick Up 4x4	Dual Cab SL Pick Up 4x4	Dual Cab ST Pick Up 4x4	Dual Cab ST-X Pick Up 4x4
Fuel		1	1	1	1		1	1	
Recommended fuel type (minimum)	91 RON	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel
Fuel tank capacity (litres)	80	80	80	80	80	80	80	80	80
Fuel consumption (combined ADR 81/02) (manual/ automatic) (I/100km)∞	9.9/9.7	6.4/6.9	6.3/6.8	6.3/6.8	6.6/7.1	6.6/7.1	6.5/7.0	6.5/7.0	6.5/7.0
CO ₂ emissions (manual/automatic) (g/km) [∞]	230/225	169/183	166/179	166/179	174/187	174/187	172/186	172/186	172/186
Mechanical			T -	T .	I -	_		I .	_
Front brakes - ventilated discs Rear brakes - drum	•	•	•	•	•	•	•	•	•
Front suspension - Independent double-wishbone with	•	•	•	•	•	•	•	•	•
front stabiliser bar	•	•	•	•	•	•	•	•	•
Rear suspension - 5-link with shock absorber	•	•	•	•		•	•	•	•
Rear suspension - Leaf spring					•				
Power steering	•	•	•	•	•	•	•	•	•
Wheels/Tyres		I			I		I		
15" steel wheels with 195/R15C tyres	•	_							
16" steel wheels with 205/R16C tyres		•			•	•			
16" steel wheels with 255/70R16 tyres 16" alloy wheels with 255/70R16 tyres			•				•	•	
18" alloy wheels with 255/60R18 tyres			•	•				•	•
Full-size spare wheel (steel)	•	•	•		•	•	•	•	•
Full-size spare wheel (alloy)		-	-	•	-		-	-	•
			<u> </u>	l				1	
Interior	l								
Seating capacity	5	5	5	5	5	5	5	5	5
6-way driver seat with manual slide/recline/height adjustment	•	•	•		•	•	•	•	
8-way driver seat with power slide/recline/height adjustment & power lumbar support				•					•
Heated front seats				•					•
Front passenger seat with manual slide & recline	•	•	•	•	•	•	•	•	•
Front headrests with up/down adjustment	•	•	•	•	•	•	•	•	•
Second row headrests (2)	•	•	•	•	•	•	•	•	•
Seat trim	Cloth	Cloth	Cloth	Leather Accented [‡]	Cloth	Cloth	Cloth	Cloth	Leather Accented [‡]
Flip up rear seats	•	•	•	•	•	•	•	•	•
Single CD player, AM/FM radio, AUX & USB/iPod^ connectivity	•	•	•	•	•	•	•	•	•
Steering wheel audio controls	•	•	•	•	•	•	•	•	•
NissanConnect™ smartphone integration Colour 5" display audio			•	•			•	•	•
Satellite Navigation with 3D Mapping and 7" integrated									
colour display with touch screen			•	•				•	•
Speakers	6	6	6	6	6	6	6	6	6
Bluetooth* handsfree phone system via steering wheel controls	•	•	•	•	•	•	•	•	•
Bluetooth* audio streaming	•	•	•	•	•	•	•	•	•
Cruise control	•	•	•	•	•	•	•	•	•
Manual tilt adjustable steering column	•	•	•	•	•	•	•	•	•
Air-conditioning with heater controls	•	•	•		•	•	•	•	
Air-conditioning with dual zone climate control				•					•
Rear air vents in centre console	•	•	•	•	•	•	•	•	•
Remote keyless entry Intelligent Key™ with remote keyless entry		•	•	•	•	•	•	•	•
Push button engine start				•					•
Urethane steering wheel & shift lever	•	•			•	•	•		
Leather accented * steering wheel & handbrake	-		•	•				•	•
Chrome interior door handles		•	•	•	•	•	•	•	•
Front passenger assist grips (2)	•	•	•	•	•	•	•	•	•
Second row passenger assist grips (2)	•	•	•	•	•	•	•	•	•
Centre console storage	•	•	•	•	•	•	•	•	•
Glove compartment	•	•	•	•	•	•	•	•	•
Dashboard upper storage tray	•	•	•	•	•	•	•	•	•
Front door storage pockets	•	•	•	•	•	•	•	•	•
Rear door storage pockets	•	•	•	•	•	•	•	•	•



Specifications	Dual Cab DX Pick Up 4x2	Dual Cab RX Pick Up 4x2	Dual Cab ST Pick Up 4x2	Dual Cab ST-X Pick Up 4x2	Dual Cab RX Cab Chassis 4x4	Dual Cab RX Pick Up 4x4	Dual Cab SL Pick Up 4x4	Dual Cab ST Pick Up 4x4	Dual Cab ST-X Pick Up 4x4
Front row cup holders (4) & bottle holders (2)	•	•	•	•	•	•	•	•	•
Second row bottle holders (2)	•	•	•	•	•	•	•	•	•
Driver and front passenger seat back pockets				•					•
Driver & front passenger sun visors	•	•	•	•	•	•	•	•	•
Driver & front passenger illuminated vanity mirrors		•	•	•	•	•	•	•	•
Sunglasses holder (overhead console)	•	•	•	•	•	•	•	•	•
Power windows with driver auto up/down button	•	•	•	•	•	•	•	•	•
Day/night rear view mirror with manual anti-dazzle	•	•			•	•			
Day/night rear view mirror with electric anti-dazzle & compass			•	•			•	•	•
Front map lights (2)	•	•	•	•	•	•	•	•	•
Interior room light	•	•	•	•	•	•	•	•	•
Rear interior lights (2) – combined with optional sunroof				Opt					Opt
Door operated interior lights	•	•	•	•	•	•	•	•	•
Illuminated ignition switch				•					•
· · · · · · · · · · · · · · · · · · ·				-					
Rear window demister		•	•	•	•	•	•	•	•
12 volt power socket (3)	•	•	•	•	•	•	•	•	•
Vinyl floor coverings - front and rear	•	•			•	•	•		
Floor carpet - front and rear			•	•				•	•
Carpet floor mats - front and rear				•					•
Instrumentation	L								
Speedometer, tachometer, odometer, trip meter	•	•	•	•	•	•	•	•	•
Advanced Drive-Assist™ Display (inc: Instant & average			•	•			•	•	•
fuel economy, distance to empty, average speed)			-	_			-	-	_
Instant to average fuel economy, distance to empty	•	•			•	•			
Digital clock	•	•	•	•	•	•	•	•	•
Safety/Security									
				_				_	
Reversing camera			•	•			•	•	•
Reversing sensors Anti-lock Braking System (ABS) and Electronic Brakeforce				•					•
Distribution (EBD)	•	•	•	•	•	•	•	•	•
Traction Control System (TCS)	•	•	•	•	•	•	•	•	•
Vehicle Dynamic Control (VDC) with Brake Limited Slip Differential (BLSD)	•	•	•	•	•	•	•	•	•
Active Brake Limited Slip (ABLS)					•	•	•	•	•
Brake Assist (BA)	•	•	•	•	•	•	•	•	•
Hill Start Assist (HSA)									•
Hill Descent Control (HDC)									•
Electronic rear differential lock							•	•	•
Driver & front passenger front-impact SRS airbags	•	•	•	•	•	•	•	•	•
Driver & front passenger side-impact SRS airbags	•	•	•	•	•	•	•	•	•
		-	-	•	-	-	-	•	-
Driver knee airbag	•	•	•	-	•	•	•		•
Front to rear SRS curtain airbags	•	•	•	•	•	•	•	•	•
3-point Emergency Locking Retractor (ELR) seatbelts (all seats) Driver & front passenger seatbelts with load limiters	•	•	•	•	•	•	•	•	•
& pre-tensioners	•	•	•	•	•	•	•	•	•
Driver & front passenger seatbelt height adjustment	•	•	•	•	•	•	•	•	•
Driver & front passenger seatbelt warning	•	•	•	•	•	•	•	•	•
Second row seatbelt alert	•	•	•	•	•	•	•	•	•
Second row child restraint anchorage points (3)	•	•	•	•	•	•	•	•	•
Daytime running lights	•	•			•	•			
LED signature daytime running lights			•	•			•	•	•
Automatic on/off headlights - twilight detection	•	•	•	•	•	•	•	•	•
Hazard warning lights	•	•	•	•	•	•	•	•	•
LED high mounted stop light	•	•	•	•	•	•	•	•	•
			-	-			1	-	
Collapsible steering column	•	•	•	•	•	•	•	•	•
Child safety rear door locks	•	•	•	•	•	•	•	•	•
Door side intrusion bars	•	•	•	•	•	•	•	•	•
Zone body structure	•	•	•	•	•	•	•	•	•
Front & rear crumple zones	•	•	•	•	•	•	•	•	•
Front variable intermittent windscreen wipers	•	•	•	•	•	•	•	•	•
Door ajar warning light (all doors)	•	•	•	•	•	•	•	•	•
Nissan Anti-Theft System (NATS) vehicle immobiliser	•	•	•	•	•	•	•	•	•
Vehicle Security System (VSS) alarm		•	•	•	•	•	•	•	•
, . ,	1		1				1		



Specifications	Dual Cab DX Pick Up 4x2	Dual Cab RX Pick Up 4x2	Dual Cab ST Pick Up 4x2	Dual Cab ST-X Pick Up 4x2	Dual Cab RX Cab Chassis 4x4	Dual Cab RX Pick Up 4x4	Dual Cab SL Pick Up 4x4	Dual Cab ST Pick Up 4x4	Dual Cab Pick Up
Exterior	_				4,4				
Alloy sports bar with integrated high mounted stop light			•	•				•	•
Privacy glass (second row & rear window)		•	•	•	•	•	•	•	
Halogen headlights	•	•	-		•	•			-
ED projector headlights		-	•	•			•	•	•
Front fog lights			•	•				•	•
? channel Utili-Track™ system			-	•				-	•
Tie-down points inside bed (4)	•	•	•	-		•	•	•	-
2V outlet inside bed	-	•	•	•		•	•	•	•
Protective tubliner		-	-	•		-		-	•
Side steps			•	•			•	•	•
Roof rails				•					•
Antenna	•	•	•	•	•	•	•	•	•
Black door mirrors	•						•		_
	•	_	_	•	_	_	•	•	_
Chrome door mirrors	_	•	•	•	•	•	_	•	•
Door mirrors with power adjustment & manual folding Heated door mirrors with power adjustment &	•	•			•	•	•		
manual folding			•					•	
leated door mirrors with power adjustment/folding & ntegrated LED indicator lights				•					•
Front bumper body colour	•	•	•	•	•	•	•	•	
Chrome bumper with rear step	•	•	•	•		•	•	•	•
Black door handles	•	-	-	-		-	•	-	-
Chrome door handles	-	•	•	•	•	•	-	•	•
/-Motion chrome front grille	•	•	•	•	•	•	•	•	
Sunroof (electric one-touch power tilt & slide)				Opt					Opt
Rear power sliding window		•	•	•	•	•	•	•	•
Rear spoiler with protective finisher	•	•	•	•		•	•	•	•
Front mudflaps		-	-		•			-	•
Front and rear mudflaps	•	•	•	•		•	•	•	•
Front towing hook	•	•	•	•	•	•	•	•	•
Lockable fuel lid	•				•	•			
Electromagnetic lockable fuel lid		•	•	•		•	•	•	•
Aanual lockable rear tailgate (key)	•	•	•	•		•	•	•	•
nativatiockable real taligate (key)	•	•	•	•		•		•	•
Colours									
Polar White (QM1)	S	S	S		S	S	S	S	
Burning Red (AX6)	S	S	S	S	S	S	S	S	S
Cosmic Black (G42)	S	S	S	S	S	S	S	S	S
Brilliant Silver (K23) *	P	P	P	P	P	Р	Р	P	Р
Deep Sapphire (RAA)*	P	P	P	P	P	P	P	P	P
Hornet Gold (EAU)*	<u> </u>		P	P				P	Р
Slate Grey (K21)*			P	P				P	Р
White Diamond (QXI)				S					S
myNissan Ownership									I
nyNissan Service Certainty ^M	•	•	•	•	•	•	•	•	•
year/100,000 kms Warranty**	•	•	•	•	•	•	•	•	•
year 24-Hour Roadside Assistance Program **	•	•	•	•	•	•	•	•	•
Genuine Nissan Extended Warranty 🛇	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt



Diesel	Diesel		Petrol				
Towball download	Reduce Loaded Vehicle Mass	Towball download	Reduce Loaded Vehicle Mass				
0kg	GVM** (All Variants)	0kg	GVM** (All Variants)				
100kg	below GVM** by 130kg	100kg	below GVM** by 110kg				
200kg	below GVM** by 280kg	160kg	below GVM** by 200kg				
300kg	below GVM** by 410kg	200kg	below GVM** by 260kg				

If the laden vehicle's mass is reduced as shown in the tables, the towball download can be increased correspondingly. Accordingly, if the laden mass of diesel variants is 410kg less than the GVM**, a towball download of 300kg is approved. For petrol variants, if the laden mass is 260kg less than the GVM**, a towball download of 200kg is approved. Different trailer types and different trailer manufacturers have varying towball downloads. The customer will need to contact the trailer manufacturer for information as to the download. Nissan is not able to make any recommendation on the use or suitability of load-levelling or weight distribution devices to be fitted to the vehicle. Customers should contact the manufacturers of these devices for further information.

- ** GVM = Gross Vehicle Mass. GVM is the maximum laden mass of a motor vehicle
- Kerb mass = unladen mass of vehicle with full fuel, excludes tray body for Cab Chassis vehicles.
- Payload is the GVM minus the Kerb mass. The kerb mass does not include passengers, luggage, cargo, any accessories fitted or any towball download (as appropriate). Payload is distributed across both the front and rear axles, never exceed the GVM or the axle limits.
- Indicates a premium paint, which is available at extra cost.
 Figures tested in accordance with ADR81/02 (combined test). Figures stated for the purposes of comparison amongst vehicles only. Actual fuel consumption depends on factors such as traffic conditions, vehicle condition, how you drive and any accessories fitted.
- Towing capacity is subject to towbar/towball capacity and vehicle laden condition. The capacity may be reduced if a non genuine Nissan towbar is fitted. The permitted download is directly related to the laden mass of vehicle.







Interior leather accented seat trim[‡] (ST-X)

- Features vary by grade
- # Gross Combined Mass with braked trailer
- ^ iPod is a registered trade mark of Apple Inc.
- Leather accented features and upholstery may contain synthetic material.

 Ask your Nissan Dealer to explain exactly what items are covered in each Scheduled Service. Applies for up to 6 years/120,000kms (whichever occurs first). Some exclusions apply. Ask your Nissan Dealer or visit nissan.com.au/service to find out more and for full terms and conditions.
- ** New Vehicle Warranty expires 36 months from date of first registration or after 100,000km (whichever comes first). Conditions apply. See nissan.com.au for more details.
- Terms and conditions apply, please visit nissan.com.au/roadsideassistance.
 Conditions apply. Ask your Nissan Dealer or visit nissan.com.au for full terms and conditions.





For more information please visit nissan.com.au/owners, ask your Nissan Dealer or phone 1800 035 035 during normal AEST business hours.

All illustrations, information and specifications presented and referred to in this brochure are for Series II Navara models (October 2016 production onwards), and were correct at the time this brochure was approved for printing. The colours in the photographs may vary from actual colours. However, Nissan Motor Co (Australia) Pty. Ltd. reserves the right, subject to the laws of Australia and/or the regulations of any competent authority which may apply from time to time, at its discretion at anytime and without prior notice to discontinue or change the models, features, specifications, designs and prices of the products referred to in this brochure and any optional equipment therefore without incurring any liability whatsoever to any purchaser or prospective purchaser of any such products. Some of the items referred to herein are optional at extra cost. Some options may be required in combination with other options. Always consult your Nissan Dealer for the latest information on models, specifications, features, prices, options and availability. Nissan Motor Co (Australia) Pty. Ltd. ACN 004 663 156. Updated December 2016. NAV0880

Follow us: @Nissan Aus



Check out: NissanAustralia Channel







Specifications	King Cab RX Cab Chassis 4x2	King Cab RX Cab Chassis 4x4	King Cab RX Pick Up 4x4	King Cab ST Pick Up 4x4	King Cab ST-2 Pick Up 4x4
Engine					
YS23DDTT 2.3 litre intercooled twin turbo-diesel, DOHC				•	•
YS23DDT 2.3 litre intercooled single turbo-diesel, DOHC	•	•	•		
Displacement (cc)	2298	2298	2298	2298	2298
Bore x stroke (mm)	85.0 x 101.3	85.0 x 101.3	85.0 x 101.3	85.0 x 101.3	85.0 x 101.3
Maximum power (kW@rpm)	120@3750	120@3750	120@3750	140@3750	140@3750
Maximum torque (Nm@rpm)	403@1500-2500	403@1500-2500	403@1500-2500	450@1500-2500	450@1500-250
Common rail direct injection	•	•	•	•	•
Transmission					
6-speed manual	•	•	•	•	•
7-speed automatic with manual mode				Opt	Opt
Transfer case - Dual range 4x4 with electronic 4WD selection		•	•	•	•
Ratio 1st (manual/automatic)	4.685	4.685	4.685	4.685/4.886	4.685/4.886
Ratio 2nd (manual/automatic)	2.478	2.478	2.478	2.478/3.169	2.478/3.169
Ratio 3rd (manual/automatic)	1.623	1.623	1.623	1.623/2.027	1.623/2.027
Ratio 4th (manual/automatic)	1.207	1.207	1.207	1.207/1.411	1.207/1.411
Ratio 5th (manual/automatic)	1.000	1.000	1.000	1.000/1.000	1.000/1.000
Ratio 6th (manual/automatic)	0.808	0.808	0.808	0.808/0.864	0.808/0.864
Ratio 7th (automatic)				0.774	0.774
Ratio Reverse (manual/automatic)	4.709	4.709	4.709	4.709/4.041	4.709/4.041
Final drive (manual/automatic)	3.538	3.538	3.538	3.692/3.357	3.692/3.357
Transfer ratio - low		2.717	2.717	2.717	2.717
Transfer ratio - high		1.000	1.000	1.000	1.000
Dimensions					
Overall length (mm)	5120	5120	5255	5255	5255
Overall width (excluding mirrors) (mm)	1790	1790	1790	1850	1850
Overall height (mm)	1750	1770	1770	1780	1780
Wheelbase (mm)	3150	3150	3150	3150	3150
Track front/rear (mm)	1550/1550	1550/1550	1550/1550	1570/1570	1570/1570
Min. turning circle (kerb to kerb) (m)	11.8	11.8	11.8	12.4	12.4
Ground clearance unladen (mm)	213	217	218	229	230
Overhang - front (mm)	870	870	870	870	870
Overhang - rear (mm)	1100	1100	1235	1235	1235
Approach angle (degrees)	31.7	32.5	32.5	32.2	32.4
Departure angle (degrees)	24.8	25.9	25.9	26.5	26.7
Ramp breakover angle (degrees)	21.3	22.7	22.7	23.7	23.9
Cargo Bed - length floor (mm)			1788	1788	1788
Cargo Bed - length top (mm)			1750	1750	1750
Cargo Bed - width floor (mm)			1560	1560	1560
Cargo Bed - width top (mm)			1490	1490	1490
Cargo Bed - width between wheel arches (mm)			1130	1130	1130
Cargo Bed - tailgate opening width (mm)			1360	1360	1360
Cargo Bed - height (mm)			474	474	474
Weights					
Gross Vehicle Mass (GVM**) (kg)	2910	2910	2910	2910	2910
Gross Combined Mass (GCM*) (kg)	5910	5910	5910	5910	5910
Kerb mass ^s manual/automatic (kg)	1651	1729	1866	1911/1914	1945/1948
Payload ^Δ manual/automatic (kg)	1259	1181	1044	999/996	965/962
Gross front axle (kg)	1320	1320	1320	1320	1320
Gross rear axle (kg)	1750	1750	1750	1750	1700
Towing Capacity [†]					
Trailer without brakes (kg)	750	750	750	750	750
Trailer with brakes (kg)	3500	3500	3500	3500	3500
Towball download (kg)	See table	See table	See table	See table	See table
Fuel					
Recommended fuel type	Diesel	Diesel	Diesel	Diesel	Diesel
Fuel tank capacity (litres)	80	80	80	80	80
Fuel consumption (combined ADR 81/02) (manual/automatic) (I/100km) **	6.4	6.6	6.6	6.5/7.0	6.5/7.0
CO₂ emissions (manual/automatic) (g/km) [∞]	169	174	174	172/186	172/186



Specifications	King Cab RX Cab Chassis 4x2	King Cab RX Cab Chassis 4x4	King Cab RX Pick Up 4x4	King Cab ST Pick Up 4x4	King Cab ST-X Pick Up 4x4
Mechanical			I		
Front brakes - ventilated discs	•	•	•	•	•
Rear brakes - drum	•	•	•	•	•
Front suspension - Independent double-wishbone with front stabiliser bar	•	•	•	•	•
Rear suspension - Leaf spring	•	•	•	•	•
Power steering	•	•	•	•	•
Wheels/Tyres	ı				
16" steel wheels with 205/R16C tyres	•	•	•		
16" alloy wheels with 255/70R16 tyres	-	-	-	•	
18" alloy wheels with 255/60R18 tyres					•
Full-size spare wheel (steel)	•	•	•	•	
Full-size spare wheel (alloy)					•
	1		l		
Interior					
Seating capacity	4	4	4	4	4
6-way driver seat with manual slide/recline/height adjustment	•	•	•	•	
$8\mbox{-way}$ driver seat with power slide/recline/height adjustment $\&$ power lumbar support					•
Heated front seats					•
Front passenger seat with manual slide & recline	•	•	•	•	•
Front headrests with up/down adjustment	•	•	•	•	•
Second row headrests (2)	•	•	•	•	•
Seat trim	Cloth	Cloth	Cloth	Cloth	Leather Accented#
Flip up rear seats	•	•	•	•	•
Single CD player, AM/FM radio, AUX & USB/iPod^ connectivity	•	•	•	•	•
Steering wheel audio controls	•	•	•	•	•
NissanConnect™° smartphone integration				•	•
Colour 5" display audio				•	
Satellite Navigation with 3D Mapping and 7" integrated colour display with touch screen					•
Speakers	4	4	4	4	4
Bluetooth" handsfree phone system via steering wheel controls	•	•	•	•	•
Bluetooth® audio streaming	•	•	•	•	•
Cruise control	•	•	•	•	•
Manual tilt adjustable steering column	•	•	•	•	•
Air-conditioning with heater controls	•	•	•	•	
Air-conditioning with dual zone climate control					•
Rear air vents in centre console	•	•	•	•	•
Remote keyless entry	•	•	•	•	
Intelligent Key™ with remote keyless entry					•
Push button engine start					•
Urethane steering wheel & shift lever	•	•	•		
Leather accented [‡] steering wheel & handbrake				•	•
Front chrome interior door handles	•	•	•	•	•
Front passenger assist grips (2)	•	•	•	•	•
Centre console storage	•	•	•	•	•
Glove compartment	•	•	•	•	•
Dashboard upper storage tray	•	•	•	•	•
Front door storage pockets	•	•	•	•	•
Rear door storage pockets	•	•	•	•	•
Front row cup holders (4) & bottle holders (2)	•	•	•	•	•
Driver and front passenger seat back pockets	_	_	_	_	•
Driver & front passenger sun visors	•	•	•	•	•
Driver & front passenger illuminated vanity mirrors	•	•	•	•	•
Sunglasses holder (overhead console) Power windows with driver auto up /down button	•	•	•	•	•
Power windows with driver auto up/down button Day/pight rear view mirror with manual anti-dazzle	•	•	•	<u> </u>	•
Day/night rear view mirror with manual anti-dazzle	•	•	<u> </u>	_	•
Day/night rear view mirror with electric anti-dazzle & compass Front map lights (2)	•	•	•	•	•
Front map lights (2)	•	•	•	•	•
Interior room light Door operated interior lights	•	•	•	•	•
Door operated interior lights	•	•	•	•	•
Illuminated ignition switch					



Specifications	King Cab RX Cab Chassis 4x2	King Cab RX Cab Chassis 4x4	King Cab RX Pick Up 4x4	King Cab ST Pick Up 4x4	King Cab ST-X Pick Up 4x4
2 volt power socket (3)	•	•	•	•	•
loor carpet - front and rear	•	•	•	•	•
Carpet floor mats - front and rear					•
nstrumentation					
peedometer, tachometer, odometer, trip meter	•	•	•	•	•
dvanced Drive-Assist™ Display (inc: Instant & average				•	•
uel economy, distance to empty, average speed)	_	_	_		
nstant to average fuel economy, distance to empty Digital clock	•	•	•	•	•
ighta clock					
Safety/Security					
eversing camera				•	•
Reversing sensors					•
anti-lock Braking System (ABS) and Electronic Brakeforce Distribution (EBD)	•	•	•	•	•
raction Control System (TCS)	•	•	•	•	•
Pehicle Dynamic Control (VDC) with Brake Limited Slip Differential (BLSD)	•	•	•	•	•
ctive Brake Limited Slip (ABLS)		•	•	•	•
rake Assist (BA)	•	•	•	•	•
iill Start Assist (HSA)					•
ill Descent Control (HDC)					•
ectronic rear differential lock				•	•
river & front passenger front-impact SRS airbags	•	•	•	•	•
river & front passenger side-impact SRS airbags	•	•	•	•	•
river knee airbag	•	•	•	•	•
ront to rear SRS curtain airbags	•	•	•	•	•
point Emergency Locking Retractor (ELR) seatbelts (all seats)	•	•	•	•	•
	•	•	•	•	•
river & front passenger seatbelts with load limiters & pre-tensioners			-	-	
river & front passenger seatbelt height adjustment	•	•	•	•	•
river & front passenger seatbelt warning	•	•	•	•	•
econd row seatbelt alert	•	•	•	•	•
aytime running lights	•	•	•		
ED signature daytime running lights				•	•
utomatic on/off headlights - twilight detection	•	•	•	•	•
azard warning lights	•	•	•	•	•
ED high mounted stop light	•	•	•	•	•
ollapsible steering column	•	•	•	•	•
oor side intrusion bars	•	•	•	•	•
one body structure	•	•	•	•	•
ront & rear crumple zones	•	•	•	•	•
ront variable intermittent windscreen wipers	•	•	•	•	•
oor ajar warning light (all doors)	•	•	•		•
lissan Anti-Theft System (NATS) vehicle immobiliser					_
/ehicle Security System (VSS) alarm	•	•	•	•	•
enice security system (vss) diami	· ·				
exterior					
lloy sports bar with integrated high mounted stop light				•	•
rivacy glass (second row & rear window)	•	•	•	•	•
alogen headlights	•	•	•		
ED projector headlights				•	•
ront fog lights				•	•
channel Utili-Track™ system					•
e-down points inside bed (4)			•	•	
2V outlet inside bed			•	•	•
rotective tubliner					•
de steps				•	•
·	•	•	•	•	•
ntenna				-	-
hrome door mirrors	•	•	•	•	•
oor mirrors with power adjustment & manual folding	•	•	•		
eated door mirrors with power adjustment & power folding & integrated ED indicator lights				•	•
ront bumper body colour	•	•	•	•	•
hrome bumper with rear step			•	•	•
hrome door handles	•	•	•	•	•
-Motion chrome front grille	•	•	•	•	•
		•			•
Rear power sliding window	•	•	•	•	•



Opt Optional

NISSAN NAVARA KING CAB SPECIFICATIONS

Standard

Not available

Specifications	King Cab RX Cab Chassis 4x2	King Cab RX Cab Chassis 4x4	King Cab RX Pick Up 4x4	King Cab ST Pick Up 4x4	King Cab ST-X Pick Up 4x4
Rear spoiler with protective finisher			•	•	•
Front mudflaps	•	•			
Front and rear mudflaps			•	•	•
Front towing hook	•	•	•	•	•
Lockable fuel lid	•	•			
Electromagnetic lockable fuel lid			•	•	•
Manual lockable rear tailgate (key)			•	•	•
Colours					
Polar White (QM1)	S	S	S	S	
Burning Red (AX6)	S	S	S	S	S
Cosmic Black (G42)	S	S	S	S	S
Brilliant Silver (K23) *	P	Р	P	Р	Р
Deep Sapphire (RAA)*	P	Р	Р	P	Р
Hornet Gold (EAU)*				Р	Р
Slate Grey (K21)*				P	Р
White Diamond (QX1)					S
myNissan Ownership					
myNissan Service Certainty ^M	•	•	•	•	•
3 year/100,000 kms Warranty**	•	•	•	•	•
3 year 24-Hour Roadside Assistance Program **	•	•	•	•	•
Genuine Nissan Extended Warranty ◊	Opt	Opt	Opt	Opt	Opt

S Standard paint

P Premium paint available at extra cost



Diesel					
Towball download	Reduce Loaded Vehicle Mass				
0kg	GVM** (All Variants)				
100kg	below GVM** by 130kg				
200kg	below GVM** by 280kg				
300kg	below GVM** by 410kg				

If the laden vehicle's mass is reduced as shown in the tables, the towball download can be increased correspondingly. Accordingly, if the laden mass of diesel variants is 470kg less than the GVM*, a towball download of 300kg is approved. Different trailer types and different trailer manufacturers have varying towball downloads. The customer will need to contact the trailer manufacturer for information as to the download. Nissan is not able to make any recommendation on the use or suitability of loadlevelling or weight distribution devices to be fitted to the vehicle. Customers should contact the manufacturers of these devices for further information.

- $\ensuremath{\mathsf{GVM}}$ = Gross Vehicle Mass. $\ensuremath{\mathsf{GVM}}$ is the maximum laden mass of a motor vehicle
- Kerb mass = unladen mass of vehicle with full fuel, excludes tray body for Cab Chassis vehicles
- Payload is the GVM minus the Kerb mass. The kerb mass does not include passengers, luggage, cargo, any accessories fitted or any towball download (as appropriate). Payload is distributed across both the front and rear axles, never exceed the GVM or the axle limits. Indicates a premium paint, which is available at extra cost
- Figures tested in accordance with ADR81/02 (combined test). Figures stated for the purposes of comparison amongst vehicles only. Actual fuel consumption depends on factors such as traffic conditions, vehicle condition, how you drive and any accessories fitted.

 Towing capacity is subject to towbar/towball capacity and vehicle laden condition. The capacity
- may be reduced if a non genuine Nissan towbar is fitted. The permitted download is directly related to the laden mass of vehicle.
- Features vary by grade.
 iPod is a registered trade mark of Apple Inc.
- Gross Combined Mass with braked trailer. Leather accented features and upholstery may contain synthetic material
- Ask your Nissan Dealer to explain exactly what items are covered in each Scheduled Service.

 Applies for up to 6 years/120,000kms (whichever occurs first). Some exclusions apply. Ask your Nissan Dealer or visit nissan.com.au/service to find out more and for full terms and conditions
- New Vehicle Warranty expires 36 months from date of first registration or after 100,000km
- (whichever comes first). Conditions apply. See nissan.com.au for more details. Terms and conditions apply, please visit nissan.com.au/roadsideassistance.
- Conditions apply. Ask your Nissan Dealer or visit nissan.com.au for full terms and conditions.



Interior cloth seat trim (RX and ST models only)



Interior leather accented seat trim[‡] (ST-X)





For more information please visit nissan.com.au/owners, ask your Nissan Dealer or phone 1800 035 035 during normal AEST business hours.

All illustrations, information and specifications presented and referred to in this brochure are for Series II Navara models (October 2016 production onwards), and were correct at the time this brochure was approved for printing. The colours in the photographs may vary from actual colours. However, Nissan Motor Co (Australia) Pty. Ltd. reserves the right, subject to the laws of Australia and/or the regulations of any competent authority which may apply from time to time, at its discretion at anytime and without prior notice to discontinue or change the models, features, specifications, designs and prices of the products referred to in this brochure and any optional equipment therefore without incurring any liability whatsoever to any purchaser or prospective purchaser of any such products. Some of the items referred to herein are optional at extra cost. Some options may be required in combination with other options. Always consult your Nissan Dealer for the latest information on models, specifications, features, prices, options and availability. Nissan Motor Co (Australia) Pty. Ltd. ACN 004 663 156. Updated December 2016. NAV0883

Follow us: @Nissan Aus



Check out: NissanAustralia Channel









Specifications	Single Cab DX	Single Cab RX	Single Cab DX	Single Cab RX
	Cab Chassis 4x2	Cab Chassis 4x2	Cab Chassis 4x4	Cab Chassis 4x4
ngine		•	•	_
23DDT 2.3 litre intercooled single turbo-diesel, DOHC		•	•	•
R25DE 2.5 litre petrol, DOHC	•	2200	2200	2200
isplacement (cc) ore x stroke (mm)	2488 89.0 x 100.0	2298 85.0 x 101.3	2298 85.0 x 101.3	2298 85.0 x 101.3
	122@6000	120@3750	120@3750	120@3750
aximum power (kW@rpm) aximum torque (Nm@rpm)	238@4000	403@1500-2500	403@1500-2500	403@1500-2500
	238@4000	403@1300 2300	403@1300 2300	403@1300 2300
ommon rail direct injection	•	•	•	•
ommorrian an eec n jeector		-		-
ransmission				
-speed manual	•	•	•	•
-speed automatic with manual mode				Opt
ransfer case - Dual range 4x4 with electronic 4WD selection			•	•
atio 1st (manual/automatic)	4.685	4.685	4.685	4.685/4.886
atio 2nd (manual/automatic)	2.478	2.478	2.478	2.478/3.169
atio 3rd (manual/automatic)	1.623	1.623	1.623	1.623/2.027
atio 4th (manual/automatic)	1.207	1.207	1.207	1.207/1.411
atio 5th (manual/automatic)	1.000	1.000	1.000	1.000/1.000
atio 6th (manual/automatic)	0.808	0.808	0.808	0.808/0.864
atio 7th (automatic)				0.774
atio Reverse (manual/automatic)	4.709	4.709	4.709	4.709/4.041
inal drive (manual/automatic)	3.916	3.538	3.357	3.538/3.357
	3.3.10	3.330		2.717
ransfer ratio - low			2.717	
ransfer ratio - high			1.000	1.000
Dimensions				
overall length (mm)	5120	5120	5120	5120
overall width (excluding mirrors) (mm)	1790	1790	1790	1790
Overall height (mm)	1720	1745	1735	1765
vheelbase (mm)	3150	3150	3150	3150
rack front/rear (mm)	1560/1560	1550/1550	1560/1560	1550/1550
Ain. turning circle (kerb to kerb) (m)	11.8	11.8	11.8	11.8
Ground clearance unladen (mm)	194	215	195	221
Overhang - front (mm)	870	870	870	870
Overhang - rear (mm)	1100	1100	1100	1100
Approach angle (degrees)	29.5	31.6	30.8	32.4
Departure angle (degrees)	23.0	23.3	23.3	24.3
tamp breakover angle (degrees)	19.7	21.5	20.9	22.8
	_			
Neights	2550	2010	2000	2010
iross Vehicle Mass (GVM") (kg)	2550	2910	2800	2910
iross Combined Mass (GCM") (kg)	4138	5910	5910	5910
erb mass" manual/automatic (kg)	1322	1551	1605	1630/1636
'ayload ^a manual/automatic (kg)	1228	1359	1195	1280/1274
Gross front axle (kg)	1320	1320	1320	1320
iross rear axle (kg)	1530	1750	1700	1750
owing Capacity [†]				
railer without brakes (kg)	750	750	750	750
railer with brakes (kg)	1588	3500	3500	3500
owball download (kg)	See table	See table	See table	See table
	_			
Fuel				
ecommended fuel type (minimum)	91 RON	Diesel	Diesel	Diesel
uel tank capacity (litres)	80	80	80	80
uel consumption (combined ADR 81/02) (manual/automatic) (I/100km)∞	9.9	6.4	6.6	6.6/7.1
O₂ emissions (manual/automatic) (g/km) [™]	230	169	174	174/187
#ackaries!	-			
Mechanical ront brakes - ventilated discs	•	•	•	•
	•	•		
ear brakes - drum	•	•	•	•
ear brakes - drum	•	•	•	•
Rear brakes - drum Front suspension - Independent double-wishbone with front stabiliser bar Rear suspension - Leaf spring				



Specifications	Single Cab DX Cab Chassis 4x2	Single Cab RX Cab Chassis 4x2	Single Cab DX Cab Chassis 4x4	Single Cab RX Cab Chassis 4x4
Wheels/Tyres				
15" steel wheels with 195/R15C tyres	•		•	
6" steel wheels with 205/R16C tyres		•		•
Full-size spare wheel (steel)	•	•	•	•
nterior			1	
eating capacity	2	2	2	2
-way driver seat with manual slide/recline/height adjustment	•	•	•	•
front passenger seat with manual slide & recline	•	•	•	•
front headrests with up/down adjustment	•	•	•	•
eat trim	Cloth	Cloth	Cloth	Cloth
Single CD player, AM/FM radio, AUX & USB/iPod^ connectivity	•	•	•	•
teering wheel audio controls	•	•	•	•
Speakers	4	4	4	4
Bluetooth® handsfree phone system via steering wheel controls	•	•	•	•
Bluetooth® audio streaming	•	•	•	•
Cruise control	•	•	•	•
Aanual tilt adjustable steering column	•	•	•	•
ir-conditioning with heater controls	•	•	•	•
emote keyless entry		•		•
Irethane steering wheel & shift lever	•	•	•	•
ront black interior door handles	•		•	
ront chrome interior door handles		•		•
ront passenger assist grips (2)	•	•	•	•
Centre console storage	•	•	•	•
Glove compartment	•	•	•	•
ashboard upper storage tray	•	•	•	•
ront door storage pockets	•	•	•	•
front row cup holders (4) & bottle holders (2)	•	•	•	•
oriver & front passenger sun visors	•	•	•	•
Priver & front passenger illuminated vanity mirrors		•		•
iunglasses holder (overhead console)	•	•	•	•
Power windows with driver auto up/down	•	•	•	•
Day/night rear view mirror with manual anti-dazzle	•	•	•	•
ront map lights (2)	•	•	•	•
Door operated interior lights	•	•	•	•
Rear window demister		•		•
2 volt power socket (3)	•	•	•	•
inyl floor covering	•	•	•	•
Instrumentation	_			
peedometer, tachometer, odometer, trip meter	•	•	•	•
nstant to average fuel economy, distance to empty	-	-	-	_
igital clock	•	•	•	•
afety/Security				
nti-lock Braking System (ABS) and Electronic Brakeforce Distribution (EBD)	•	•	•	•
raction Control System (TCS)	•	•	•	•
Pehicle Dynamic Control (VDC) with Brake Limited Slip Differential (BLSD)	•	•	•	•
ctive Brake Limited Slip (ABLS)			•	•
rake Assist (BA)	•	•	•	•
river & front passenger front-impact SRS airbags	•	•	•	•
river & front passenger side-impact SRS airbags	•	•	•	•
river knee airbag	•	•	•	•
ront to rear SRS curtain airbags	•	•	•	•
-point Emergency Locking Retractor (ELR) seatbelts (all seats)	•	•	•	•
river & front passenger seatbelts with load limiters & pre-tensioners	•	•	•	•
river & front passenger seatbelt height adjustment	•	•	•	•
Driver & front passenger seatbelt warning	•	•	•	•
Daytime running lights	•	•	•	•
Automatic on/off headlights - twilight detection	•	•	•	•



0kg

100kg

200kg

300kg

GVM** (All Variants)

below GVM** by 130kg

below GVM** by 280kg

below GVM** by 410kg

NISSAN NAVARA SINGLE CAB SPECIFICATIONS

Specifications		Single Cab Cha		Single Cab RX Cab Chassis 4x2	Single Cab DX Cab Chassis 4x4	Single Cab RX Cab Chassis 4x4
Hazard warning lights			,	•	•	•
LED high mounted stop light				•	•	•
Collapsible steering column			•	•	•	•
Door side intrusion bars			•	•	•	•
Zone body structure			•	•	•	•
Front & rear crumple zones				•	•	•
Front variable intermittent windsc	reen wipers		•	•	•	•
Door ajar warning light (all doors)			•	•	•	•
Nissan Anti-Theft System (NATS) ve	ehicle immobiliser		•	•	•	•
Vehicle Security System (VSS) alarr	n			•		•
Exterior						
Halogen headlights			•	•	•	•
Antenna)	•	•	•
Black door mirrors)		•	
Chrome door mirrors				•		•
Door mirrors with power adjustme	Door mirrors with power adjustment & manual folding		•	•	•	•
Front bumper body colour				•	•	•
Black door handles)		•	
Chrome door handles				•		•
V-Motion silver finish front grille			•		•	
V-Motion chrome front grille				•		•
Front mudflaps			•	•	•	•
Front towing hook)	•	•	•
Lockable fuel lid	-)	•	•	•
Colours Polar White (QM1) Brilliant Silver (K23) *		<u> </u>		S P	S P	S P
myNissan Ownership						
myNissan Service Certainty ^M		•		•	•	•
3 year/100,000 kms Warranty**		•		•	•	•
year 24-Hour Roadside Assistance Program ^{††}		•	•	•	•	•
Genuine Nissan Extended Warranty ♦		Ol	ot	Opt	Opt	Opt
Opt Optional	Not available • Star	ndard	S Stand	dard paint P	Premium paint availab	le at extra cost
Diesel	isel		Petrol	Petrol		
Towball download	Reduce Loaded Vehicle Mass		Towball download		Reduce Loaded Vehicle Mass	

GVM** (All Variants)

below GVM** by 110kg

below GVM** by 200kg

below GVM** by 260kg

If the laden vehicle's mass is reduced as shown in the tables, the towball download can be increased correspondingly. Accordingly, if the laden mass of diesel variants is 410kg less than the GVM**, a towball download of 300kg is approved. For petrol variants, if the laden mass is 260kg less than the GVM**, a towball download of 200kg is approved. Different trailer types and different trailer manufacturers have varying towball downloads. The customer will need to contact the trailer manufacturer for information as to the download. Nissan is not able to make any recommendation on the use or suitability of load-levelling or weight distribution devices to be fitted to the vehicle. Customers should contact the manufacturers of these devices for further information.

0kg


100kg

160kg

200kg



- .. GVM = Gross Vehicle Mass. GVM is the maximum laden mass of a motor vehicle
- Kerb mass = unladen mass of vehicle with full fuel, excludes tray body for Cab Chassis vehicles.
- Payload is the GVM minus the Kerb mass. The kerb mass does not include passengers, luggage, cargo, any accessories fitted or any towball download (as appropriate). Payload is distributed across both the front and rear axles, never exceed the GVM or the axle limits.
- . Indicates a premium paint, which is available at extra cost
- Figures tested in accordance with ADR81/02 (combined test). Figures stated for the purposes of comparison amongst vehicles only. Actual fuel consumption depends on factors such as traffic conditions, vehicle condition, how you drive and any accessories fitted.
- Towing capacity is subject to towbar/towball capacity and vehicle laden condition. The capacity
 may be reduced if a non genuine Nissan towbar is fitted. The permitted download is directly
 related to the laden mass of vehicle.
- ' iPod is a registered trade mark of Apple Inc
- Gross Combined Mass with braked trailer.
- Ask your Nissan Dealer to explain exactly what items are covered in each Scheduled Service.
 Applies for up to 6 years/120,000kms (whichever occurs first). Some exclusions apply. Ask your
 Nissan Dealer or visit nissan.com.au/service to find out more and for full terms and conditions.
 New Vehicle Warranty expires 36 months from date of first registration or after 100,000km
- " New Vehicle Warranty expires 36 months from date of first registration or after 100,000km (whichever comes first). Conditions apply. See nissan.com.au for more details.
- Terms and conditions apply, please visit nissan.com.au/roadsideassistance.
- Conditions apply. Ask your Nissan Dealer or visit nissan.com.au for full terms and conditions.

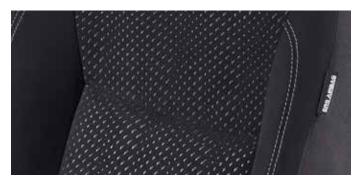

Interior cloth seat trim.





For more information please visit nissan.com.au/owners, ask your Nissan Dealer or phone 1800 035 035 during normal AEST business hours.

All illustrations, information and specifications presented and referred to in this brochure are for Series II Navara models (October 2016 production onwards), and were correct at the time this brochure was approved for printing. The colours in the photographs may vary from actual colours. However, Nissan Motor Co (Australia) Pty. Ltd. reserves the right, subject to the laws of Australia and/or the regulations of any competent authority which may apply from time to time, at its discretion at anytime and without prior notice to discontinue or change the models, features, specifications, designs and prices of the products referred to in this brochure and any optional equipment therefore without incurring any liability whatsoever to any purchaser or prospective purchaser of any such products. Some of the items referred to herein are optional at extra cost. Some options may be required in combination with other options. Always consult your Nissan Dealer for the latest information on models, specifications, features, prices, options and availability. Nissan Motor Co (Australia) Pty. Ltd. ACN 004 663 156. Updated December 2016. NAV0884

Follow us: @Nissan_Aus



Check out: NissanAustralia Channel





